Sallén D6 & LVC SideCar

Bringing high speed and maximum capacity in one cash deposit unit accompanied by a coin sidecar designed for high-volume transactions.

Sallén D6 & LVC SideCar

Bringing high speed and maximum capacity in one cash deposit unit accompanied by a coin sidecar designed for high-volume transactions.

The high-speed range has been designed to adapt to the pace of big companies and provide greater performance and flexibility in all cash deposit transactions.
Today's economy has driven consumers to use less credit and more cash, growing the amount of paper transactions worldwide. Manually managing the flow of currency into business, represents a high cost-low return task, which also carries significant security risks. Automation offers significant potential for increasing productivity of the entire process.

Retail solutions with CIT features

- For businesses dealing with many customers, employees and suppliers every day, the D6 is your best option.
- The capacity and speed of the deposit unit allow you to streamline cash flow, cut on time-consuming operations and ensure a secure environment for your customers and employees.
- Stacked banknotes in bag in semi-stacker (D6 SemiStacker) version.
- Multicurrency in the same transaction.

- Multilanguage.
- Sesami One Time Code system to open the safe.
- Visual and tactile interface via color touch screen.
- Real time accountancy of each transaction.
- Also available is installation through the wall to allow the opening of the safe from the rear side of the machine and note stacker within the bag, saving time.
- Extra capacity available in the D6L model.
- With the D6 unit you can also benefit from a range of additional options, depending on your individual needs, including coin and semi stacker versions.
- The LVC is a sidecar compatible with every Sallén Cash Management smart safe running Sesami Enterprise Software.
- The LVC device enables the convenient deposit and validation of coins in large quantities, making it ideal for environments with a moderate volume of coins to manage.
- The LVC sidecar comes in two versions: Short and Tall. Each version allows for the deposit of the coins in a plastic bag that will be sealed at the collection (if you choose the LVC with a Sealer).

Benefits
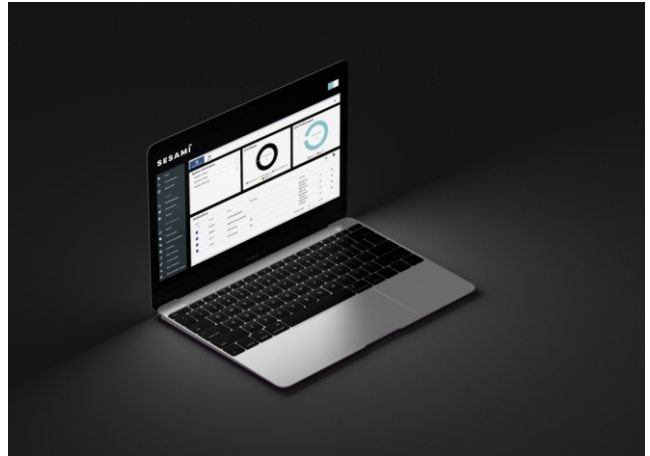
| Different identification formats | Hyperconnectivity | Reduce costs | Store safely | Endless Adaptability |

Sesami Enterprise Software

Sesami Enterprise Software platform for deposit devices with endless capabilities to embrace the future.

Hyperconnectivity
Sesami Enterprise Software platform connects with several cloud environments, including third-party systems, in real time with encrypted communication Protocol and open VPN by default. Connected, secure and efficient.

Omnipresent Access
Manage upgrades and users for any component of the device without physically needing to be on site, reducing unnecessary visits. Increase productivity by accessing real-time data, and predictive maintenance and performance analysis, giving you flexible and intelligent control of your cash deposit devices.

Endless Adaptability
Designed to be flexible and modular, it adapts rapidly and efficiently with robust, long-term reliability, to your operations and individual needs. Designed on a building block architecture with multiple configurations proven in the field.

Flexible workflow
Allows for multiple business models and licensing options. Live custom fields and configurable workflows are just some of the features of our Sesami Enterprise Software platform, which adapt to your business goals.

Advanced Reporting
Track everything with our live tailored reports, including advanced reconciliation reports for deposit collection and end of day and advanced cash monitoring. Designed to give you total control of your business.

Choose from the full range of the Sesami Suite modules, including finance modules and service operations modules.

Specifications Sallén D6

Model specifications

	D6	D6C	D6 SemiStacker	D6C SemiStacker	D6L SemiStacker
Note Capacity (up to)	10000	10000	7000	7000	15000
Coin Capacity	N/A	15 kg	N/A	15 kg	N/A
Dim. CEN IV (WxDxH)	550x627/707x1175	550x627/707x1175	550x627/707x1175	550x627/707x1175	550x627/707x1175
Dim. UL (WxDxH)	530x570/615x1155	530x570/615x1155	530x570/615x1155	530x570/615x1155	530x570/615x1155
Weight kg	455,5/328	458,5/331	460,5/333	463,5/336	450,5/323
Safe	CEN IV, UL type	CEN IV, UL type	CEN IV, UL type	CEN IV, UL type	CEN IV, UL type
Manual Deposit	Yes, on left side with anti-fishing deposit slot	Yes, on left side with anti-fishing deposit slot	Yes, on left side with anti-fishing deposit slot	Yes, on left side with anti-fishing deposit slot	Yes, on left side with anti-fishing deposit slot
Max. Power Specifications	240 W. 110/220 V. 50/60 Hz	240 W. 110/220 V. 50/60 Hz	240 W. 110/220 V. 50/60 Hz	240 W. 110/220 V. 50/60 Hz	240 W. 110/220 V. 50/60 Hz
Storage Type	Free Fall. Thermo sealed bag	Free Fall. Thermo sealed bag	Semistacker. Thermo sealed bag	Semistacker. Thermo sealed bag	Semistacker. Canvas bag

Standard features

Deposit Speed	300 banknotes/minute
Bank Note Feeder	250 banknotes capacity
Multicurrency deposits	Yes, up to 6 currencies in the same transaction
Intuitive colour touch screen interface	7"
Multilanguage	Yes
Multiserver connection	Yes
Real-time registration of each transaction	Yes
System	Linux Embedded OS
Software Platform	Sesami Enterprise Software Platform
Network	Supports VPN and multi cloud communications
Remote management	Users, Transactions, Firmwares, Banknote Validator Upgrades...
Remote note reader update	Yes
Remote data import & export	Yes
Time settings	Supports NTP synchronisation
"Unified POS" standard	Yes
Certifications	CE, ROHS, ECB (banknote reader)
Humidity	5%-95% , non condensating
Operating temperature	10° to 40°C

Options

|	
Receipt Printer	57 mm paper width
Barcode Reader	2D omnidirectional 1650 scans/s
One Time Lock	Yes
Additional locks or ID devices	Please contact Sesami Cash Management Technologies
Application customization	Please contact Sesami Cash Management Technologies
Serial Number Recognition and Voucher Recognition	Please contact Sesami Cash Management Technologies
Through-the-wall installation	Please contact Sesami Cash Management Technologies

Specifications Sallén LVC

Technical data

Temperature Range	0ºC up to 60ºC (Temp. change max. 0.2ºC/min)
Relative humidity	Up to 90% (condensation not permitted)
Coin acceptance	16 coins types max. in 24 channels
Diameter / Thickness	15-32.7mm (depending on payout disc) / 1.0-3.3mm
Max. Number of coins	With/without Sealer: Up to 14,5 kilograms of coins
Max. Coins per deposit	20
Acceptance speed	Up to 4 coins per second
Weight Tall	Sidecar with sealer system 47kg (aprox)
	Sidecar without sealer system 44kg (aprox)
Weight Short	Sidecar with sealer system 38kg (aprox)
	Sidecar without sealer system 35kg (aprox)
Thickness	2mm body layer
	4mm door layer
Dimensions	See Drawings next page

The LVC is a sidecar compatible with every Sallén Cash Management smart safe running Sesami Enterprise Software

LVC Tall Drawing
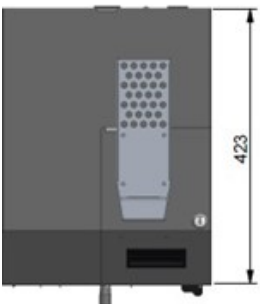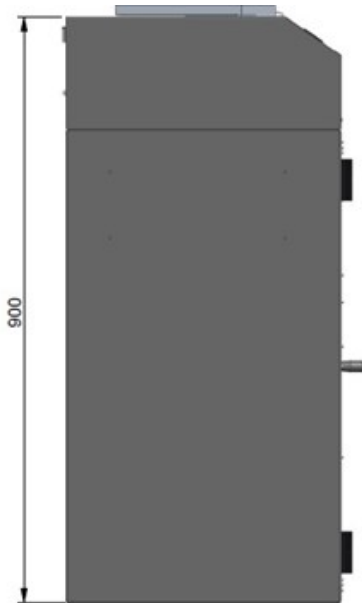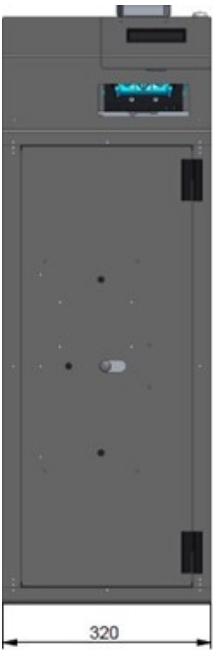
Sallén D6 & LVC SideCar

Technical Drawing LVC Short
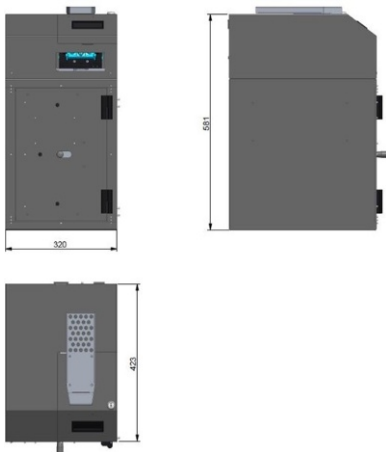
The LVC sidecar is designed to be compatible with all Sallén Cash Management smart safes running Sesami Enterprise Software. It offers the capability to conveniently deposit and validate coins in large quantities, making it an excellent choice for environments that typically handle an average number of coins.

The LVC sidecar is available in two versions: Short and Tall. Both versions allow for the coins to be deposited in a plastic bag, which can be sealed upon collection if you opt for the LVC with a Sealer feature.