


# Cavityrock®

Exterior Insulation for Cavity Wall  
and Rainscreen Applications

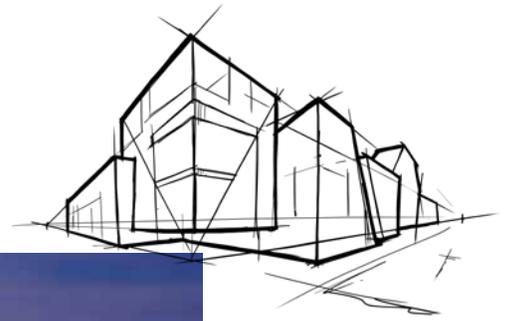

**Cavityrock® Black: now available with black mineral fiber facing for open-joint cladding systems. The facing provides long-term UV stability as outlined on the next page.**

Rush University Medical Center, Chicago, IL

ROCKWOOL Cavityrock® semi-rigid stone wool insulation board available in mono and dual density is designed for exterior cavity wall and rainscreen applications. Choose mono-density insulation in thicknesses up to 2" or dual-density in thicknesses of 2.5" to 6".

Compatible with numerous cladding attachment systems, Cavityrock® is a durable solution with non-combustible characteristics meaning that the insulation will not develop toxic smoke or promote flame spread even when directly exposed to fire. Approved for use in many NFPA 285-compliant designs, it is an important component of fire-resilient exterior wall systems when used as a continuous insulation.

Cavityrock® also offers energy efficiency with reliable thermal performance, improved acoustic comfort, and is moisture resistant to maintain insulating value for the long-term.

Also available in a black mat facer finish for open-joint cladding systems, Cavityrock® Black combines your insulation install with masking in a single step, reducing installation time and material cost to achieve your desired design aesthetic.

Learn more at [rockwool.com/products/cavityrock/](http://rockwool.com/products/cavityrock/)

## Fire Performance

The non-combustible characteristics of Cavityrock® insulation mean that it will not develop toxic smoke or promote flame spread even when directly exposed to fire.



# Cavityrock<sup>®</sup>

## Exterior Insulation for Cavity Wall and Rainscreen Applications

Technical Data Sheet

Board Insulation 07210\* • Board Insulation 07 21 13\*\*  
Cavity Wall Unit Masonry 04 27 23\*\*

ROCKWOOL Cavityrock<sup>®</sup> is a semi-rigid stone wool insulation board designed for exterior cavity wall and rainscreen applications. Compatible with numerous cladding attachment systems, Cavityrock<sup>®</sup> is non-combustible and available with a black mineral fleece facing for open-joint cladding systems.

|  | Performance   | Test Standard  |
|--|---|--|
| Compliance                                   | Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant<br>MEA Approval, New York City Approval<br>For information on CAN/ULC S702 compliance, contact ROCKWOOL Technical Support   | ASTM C612<br>236 - 05 - M                                      |
| Reaction to Fire                             | Flame spread index = 0; Smoke developed index = 0<br>Flame spread index = 0; Smoke developed index = 0<br>Determination of Non Combustibility of Building Materials - Non Combustible<br>Behaviour of materials at 750°C - Non Combustible  | ASTM E84 (UL 723)<br>CAN/ULC S102<br>CAN/ULC S114<br>ASTM E136 |
| Reaction to fire (with black mat facer)      | Flame spread index = 10; Smoke developed index = 25<br>Flame spread index = 10; Smoke developed index = 10  | ASTM E84 (UL 723)<br>CAN/ULC S102                              |
| Monolithic Density (thickness: 1", 1.5", 2") | > 4.3 lbs/ft <sup>3</sup> (>69 kg/m <sup>3</sup> )*<br>* Density will change with thickness, please contact ROCKWOOL for more information   | ASTM C303  |
| Density (thickness ≥ 2.5")                   | Dual Density - 6.2 lbs/ft <sup>3</sup> (100 kg/m <sup>3</sup> ) outer layer and 3.8 lbs/ft <sup>3</sup> (61 kg/m <sup>3</sup> ) inner layer   | ASTM C303  |
| Dimensional Stability                        | Linear Shrinkage = 0.7% @ 1200°F (650°C)  | ASTM C356  |
| Corrosion Resistance                         | Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed<br>Corrosion of Steel - Passed  | ASTM C795<br>ASTM C665   |
| Thermal Resistance                           | R-Value / inch @ 75°F                      4.3 hr.ft <sup>2</sup> .F/Btu<br>RSI value / 25.4 mm @ 24°C                0.75 m <sup>2</sup> K/W   | ASTM C518 (C177)   |
| Reaction to Moisture                         | Moisture Sorption - 0.03% by volume<br>Water Vapor Transmission, Desiccant Method - 1555ng/Pa.s.m <sup>2</sup> (27 perm)<br>Determination of Fungi Resistance - Passed  | ASTM C1104<br>ASTM E96<br>ASTM C1338                           |
| Reaction to moisture (with black mat facer)  | Moisture Sorption - 0.65% by volume<br>Water Vapor Transmission, Desiccant Method - 2435ng/Pa.s.m <sup>2</sup> (43 perm)<br>Determination of Fungi Resistance - Passed  | ASTM C1104<br>ASTM E96<br>ASTM C1338                           |
| Dimensions                                   | 1" (25.4 mm) to 4" (101.6 mm) in 1/2" increments. 5" (127 mm) , 5.5" (139.7 mm), 6" (152.4 mm), 7" (177.8 mm), 8" (203.2 mm)<br><br>24" x 48" (610 mm x 1219 mm) and 16" x 48" (406 mm x 1219 mm)   |  |
| Dimensions (with black mat facer)            | 2" (50.8 mm), 3" (76.2 mm), 4" (101.6 mm) available in 16" x 48" (406 mm x 1219 mm) and 24" x 48" (610 mm x 1219 mm) 2.5" (63.5 mm), 3.5" (88.9 mm), 5" (127 mm), 6" (152.4mm) available in 24" x 48" (610 mm x 1219 mm)  |  |
| Acoustical Performance                       | Thickness    125 Hz    250 Hz    500 Hz    1000 Hz    2000Hz    4000 Hz    NRC<br>1.5"           0.19       0.55       1.03       1.06       1.02       1.01       0.9<br>2"             0.26       0.71       1.14       1.09       1.04       1.03       1<br>3"             0.72       0.93       0.88       0.84       0.9        0.97       0.9  | ASTM C423  |
| UV Stability (with black mat facer)          | Determination of changes in color fastness: achieved rating of 5/5 at 250 hr. and 500 hr. exposure, no perceptible change in color, and a rating of 4/5 at 750 hr. and 1,000 hr. exposure.<br><br>For more information and technical reports on ISO 105-A02 results, please contact ROCKWOOL Technical Services.<br><br>Unfaced: "tested on 4.0" sample"<br>With Black Mat Facer: "tested on 3.5" sample" | ISO 105-A02: 1993  |

Issued: 03-01-2021  
Supersedes 08-23-17



Please contact ROCKWOOL for Declare labels for other ROCKWOOL manufacturing facilities.

NOTE: \*Master Format 1995 Edition \*\*Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.