


Norwegian Siding UH61

The original
**FLUTED
SIDING**

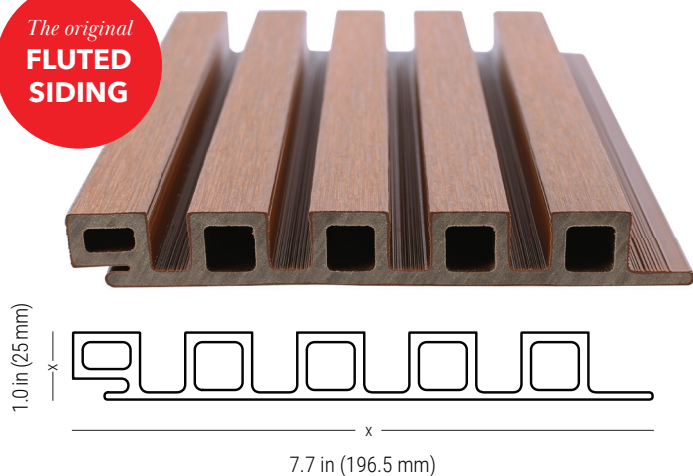

AVAILABLE LENGTHS

12' et 16'

BOARD COVERAGE


12' = 7.25 sq.ft.
16' = 9.67 sq.ft.

WEIGHT

1.88 lbs/ ln.ft.
3.00 lbs/ sq.ft.

DESIGNED TO BE INSTALLED TOGETHER


End Trim
UH50



3.0 x 3.1 in
(75 x 77.5 mm)

16 FEET ONLY

Outside Corner
UH51



3.0 x 2.1 in
(75 x 54 mm)

16 FEET ONLY

Assorted colored screws
CS-100



8 x 2 in
(203.2 x 50.8 mm)

PACKS OF 100

GET THE E-SAMPLE



NewTechWood
CANADA



CLADDING ACCESSORIES

NewTechWood cladding is installed using a range of great accessories. Our AW08 siding clips hold the boards in place, using a grooved design for simplified installation and weather resistance.



Cladding Clip
AW08



Material: Aluminum
Size: 20 x 15 x 28 mm
(0.78 x 0.59 x 1.10 in)

BOXES OF 250

Cladding Starter Clip
AW02



Material: Aluminum
Size: 15 x 14.5 mm
(0.59 x 0.57 in)

SOLD BY UNIT



STANDARD COLOURS



IPE




TECK



RED CEDAR



CEDAR



ANTIQUE




WHITE DEW



SILVER GREY



CHARCOAL



EBONY



NEWTECHWOOD The Smart Green Choice

Made from 95% recycled materials

Sustainable


Maintenance-free

Fade resistant


UV protection

25 years warranty

WEBPAGE UH61 SPECS

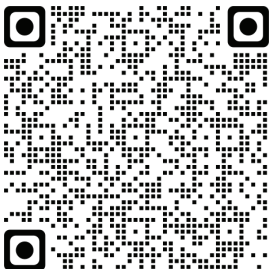

PDF FILE INSTALLATION GUIDE

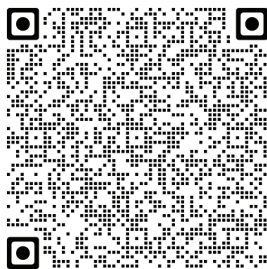

CONTACT US

TEL: (+1) 866.689.2262
INFO@NTWCANADA.CA

newtechwood.ca

Castellation Cladding Technical Sheet

Model	Photo	Dimension
UH46		121.5 x 25 mm (4.8 x 1.0 in)
UH61		196.5 x 25 mm (7.7 x 1.0 in)
UH50		75 x 54 mm (3.0 x 2.1 in)
UH51		75 x 81 mm (3.0 x 3.2 in)

Model	Photo	Dimension
UH58	 A photograph of the UH58 wood cladding profile, showing a wide, flat top surface with a recessed groove and a small, rectangular notch on the side.	196.5 x 25 mm (7.7 x 1.0 in)
UH59	 A photograph of the UH59 wood cladding profile, showing a wide, flat top surface with a recessed groove and a small, rectangular notch on the side.	90 x 54 mm (3.5 x 2.1 in)
UH60	 A photograph of the UH60 wood cladding profile, showing a wide, flat top surface with a recessed groove and a small, rectangular notch on the side.	145 x 112.5 mm (5.7 x 4.4 in)

NO.	Property	Test Method	Test results	Remark
1	Abrasion Resistance	ASTM D4060	33mg(1000cycles)	
2	Brinell hardness	EN15534	8.2N/mm ²	
3	Boiling test	EN15534	Water absorption in weigh: 0.49%	
4	Bond Strength	EN319	Average Bond Strength>2.3MPa No obvious abruption and damage after test	
5	Coefficient Linear Thermal Expansion	ASTM D696	35.6×10 ⁻⁶ mm/mm °C	
		EN15534	34.0×10 ⁻⁶ K ⁻¹	
6	Content of pentachlorophenol	CE (EN14041(2004))	2.99ppm	
7	Degree of chalking	EN15534	Rating 0, no chalking.	
8	Fire Resistance	ASTM E84	Flame Spread Index(FSI): 85 Smoke Developed Index(SDI): 300	
9	Formaldehyde Content	EN717-1	Non Detected	
		ASTM D6007-14	Non Detected	
10	Heavy Metal Content	EPA3051	Sb:ND, As:ND, Se:ND, Sn:ND	
11	Heat reversion	EN15534 EN479	Test temperature:100°C :0.17%	
12	Heat build-up	EN15534	Δ T=-2.7°C	
13	Lead Content Test	EUNo.628/2015	Non Detected	
14	Mould resistance	ASTM G21	Rating 0	
15	Moisture Content	EN15534 EN322	0.83%	
16	Neutral salt spray test	ASTM B117-2011	After 200 hours tests, there was no visible change appeared on the surface: Front surface: Δ E*=1.22, Grey Scale: 4-5 Back surface: Δ E*=1.06, Grey Scale: 4-5	
		EN15534 ISO9227	Δ E*=1.42, Grey Scale=4 (Exposure 96h)	

NO.	Property	Test Method	Test results	Remark
17	Pb, Cd, Hg, Cr ⁶⁺	RoHs-IEC62321	Pb:ND, Cd:ND, Hg:ND, Cr ⁶⁺ :ND	
18	Resistance to scratch test	ISO4586-2	Rate 2	
19	Resistance to indentation	EN15534	Apply 2000N load Brinell hardness: 60Mpa, Rate of elastic recovery: 64%	
20	Resistance to artificial weathering	EN15534 ISO4892-2	After 2000h exposure $\Delta E^*=1.09$, Grey Scale=4-5	
21	Rockwell Hardness	ASTM D785	78.7R	
22	Swelling and water absorption (24hours immersion)	EN15534-1 EN15534-4	① Swelling: 0.43% in thickness, 0.02% in width, 0.03% in length. ② Water absorption: 0.11%	
23	Swelling and water absorption (28days immersion)	EN15534	① Swelling: 0.67% in thickness, 0.04% in width, 0.07% in length. ② Water absorption: 0.27%	
24	SRI Testing	ASTM C1549 ASTM C1371 ASTM E1980	19	
25	Surface Bond quality	EN319	>2.08MPa	
26	Thermal Resistance	ASTM C518-2010	Thermal conductivity: 0.1589W/(m·k) Thermal resistance: 0.0830(m ² ·K)/W	
27	Thermal conductivity	CE (EN14041(2004))	0.19738W/m·K	
28	UV Weathering test	ASTM G154	After 3000 hours test, Grey Scale3, $\Delta E^*=3.56$	
29	VOC&TVOC	ASTM D5116-11	Non Detected	
30	Water absorption	ASTM D1037	Water absorption(24h): 0.12%	
31	Installation Span	Manufacturers Specification	500mm on center	