




1) LED function indicator, 3) Encoder

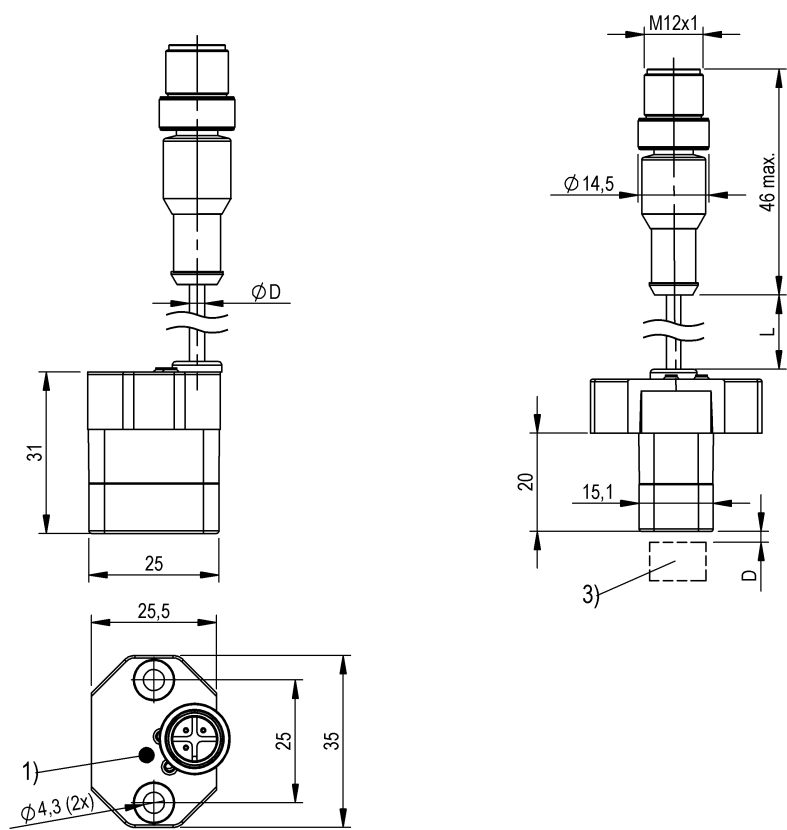

Basic features

Application	Positioning
Approval/Conformity	CE UKCA cURus WEEE
Basic standard	IEC 60947-5-2 IEC 60947-5-7
Principle of operation	Inductive positioning system

Display/Operation

Function indicator	Adjustment indicator yes
Power indicator	no

Electrical connection

Bending radius min., fixed cable	3 x D
Bending radius min., flexible cable	5 x D
Cable diameter D	2.85...3 mm
Cable length L	0.5 m
Conductor cross-section	0.14 mm ²
Connection	M12x1-Male, 3-pin, A-coded
Connection type	Cable with connector, 0.5 m, PUR
Number of conductors	3
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load resistance RL min.	2000 Ohm
No-load current Io max. at Ue	21 mA
Operating voltage Ub	15...30 VDC
Rated insulation voltage Ui	75 V DC
Rated operating voltage Ue DC	24 V
Ripple max. (% of Ue)	10 %
Slope U	1.43 V/mm

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	350 a
--------------	-------

Interface

Analog output	Analog, voltage 0...10 V
Output voltage at SI max.	10 V
Output voltage at SI min.	0 V
Output voltage at Se	5 V

Remarks

Please refer to manual.
Specification applies as shipped with the recommended targets BAM TG-XE-001 BAM TG-XE-002
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Material

Cable shield	no
Housing material	PA
Material jacket	PUR
Material sensing surface	PA

Mechanical data

Dimension	25.5 x 35 x 31 mm
Distance to position indicator min.	0.5 mm
Tightening torque max.	0.5 Nm


Range/Distance

Effective distance Se	3.50 mm
Linearity range SI	0...7 mm
Measuring range	0...7 mm
Non-linearity max.	±250 µm
Repeat accuracy per BWN	±50 µm
Temperature drift max. from end value	±3.0 %

Connector Drawings



Wiring Diagrams (Schematic)

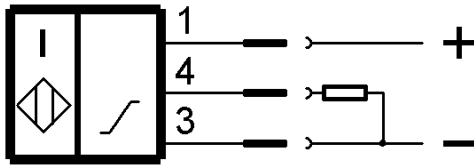

Technical Drawings

