

Product datasheet

Specifications



discrete input module Modicon Premium - 64 I 24 V DC

TSXDEY64D2K

⚠ Discontinued on: 5 Dec 2020

EAN Code: 3389110725537

⚠ Discontinued

Main

Range of product	Modicon Premium Automation platform
Product or component type	Discrete input module
Discrete input number	64 current sink isolated conforming to EN/IEC 61131-2 type 1
Discrete input voltage	24 V DC positive
Sensor power supply	19...30 V
Discrete input current	3.5 mA

Complementary

Voltage state 1 guaranteed	≥ 11 V
Current state 1 guaranteed	≥ 3 mA
Voltage state 0 guaranteed	≤ 5 V
Current state 0 guaranteed	≤ 1.5 mA
Input impedance	6300 Ohm at state 1
Response time	4 ms ≤ 7 ms
isalotion resistance	< 10 MOhm 500 V DC
Power dissipation	(1.5 W + 0.1 W x No of channels used)
Electrical connection	HE-10 connector
Marking	CE
Current consumption	155 mA at 5 V DC 315 mA at 24 V DC
Module format	Standard
Net weight	0.37 kg

Environment

Dielectric strength	1500 V AC at 50/60 Hz
---------------------	-----------------------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	CSA C22.2 No 142 73/23/EEC CSA C22.2 No 213 Class I Division 2 Group B CSA C22.2 No 213 Class I Division 2 Group A CSA C22.2 No 213 Class I Division 2 Group C UL 508 IEC 60664 CSA C22.2 No 213 Class I Division 2 Group D 89/336/EEC 93/68/EEC 92/31/EEC EN/IEC 61131-2
Product certifications	LR BV RMRS RINA ABS GL DNV
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...2000 m
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.8 cm
Package 1 Width	18.0 cm
Package 1 Length	26.0 cm
Package 1 Weight	490.0 g


Contractual warranty

Warranty	18 months
----------	-----------

Dimensions Drawings

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

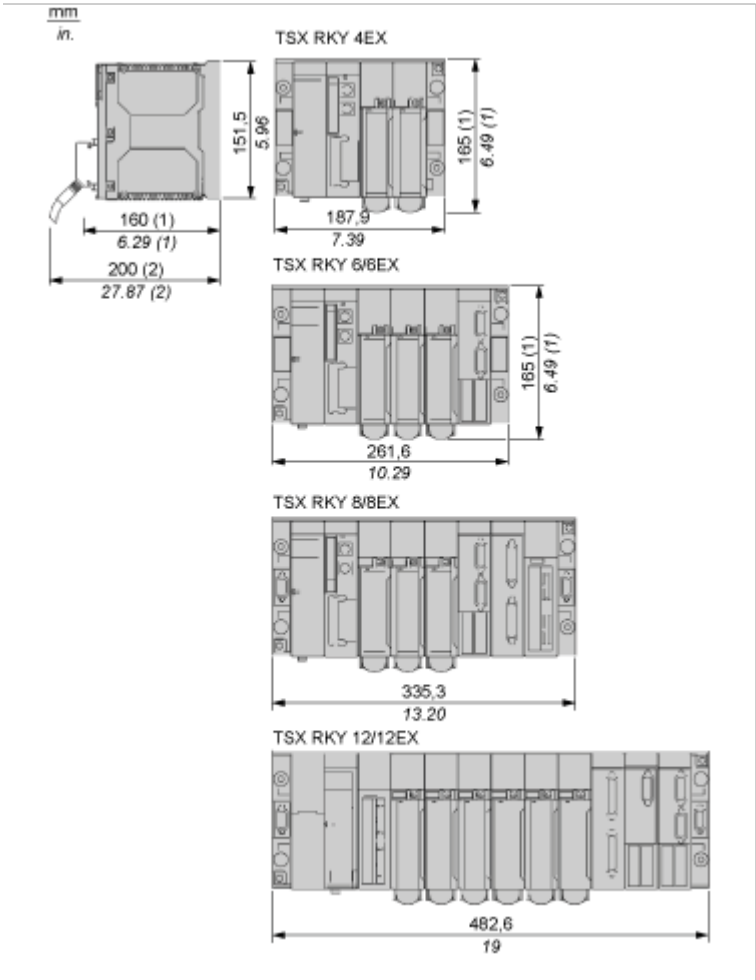


- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.

Connections and Schema

24 Vdc Discrete Input 64-Channel Module

Wiring Diagram

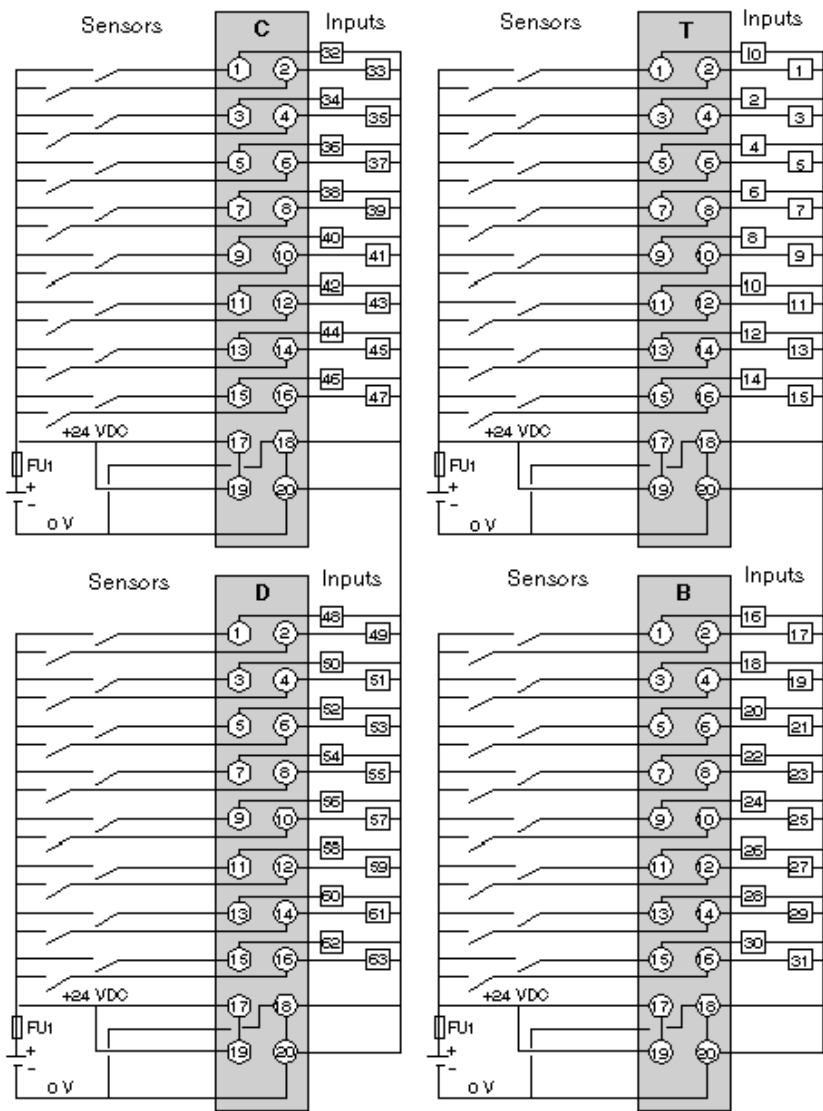

FU1 0.5 A quick-blow fuse