

Options, Configurations and Pricing

TimeTac Evo Smart Time Clock



Information www.timetac.com

Knowledge Base support.timetac.com



TimeTac Evo Smart Time Clock

Our employee time clocks are an upgrade to the punch card systems of previous years. Employees can record their arrival, departure and break times with a register of their fingerprint or a simple contact of an RFID/NFC key ring. Placed beside the door or in the reception area, our time clocks add an appealing and incredibly convenient method for your employees to record their attendance.

Regardless of how you record your time; whether you started your working day via a time clock, tracked your lunch break from your desktop computer and stopped recording as you left the building from your smartphone, all data is stored in the one system. This also means that you can usefully view your tracked time when on the move and can analyse your working hour reports from your office desk. You can of course see which device was used for time tracking.


Due to the convenience of a robust hardware solution, time clocks also bring time tracking to environments where computers or smartphones are not commonly found, such as factories, warehouses, hospitals and more.


Overview

- 1 200 x 109 x 85mm Housing
- 2 Colour-LCD 800 x 480 px display with touch screen
- 3 Customisable display options for optimal usage
- 4 RFID or RFID + fingerprint reader
- Easy to wall mount
- ✓ LAN, WLAN or GPRS (mobile) connectivity
- IP54 Protection

Configurations and Pricing

The Evo Smart Time Clock offers you different configurations to choose from. All of these time clocks include a TCP/IP LAN network card, wall mounting fixtures and a power cable. When ordering time clocks, please consider that configurations must be conducted by our hardware supplier and cannot be performed on-site.

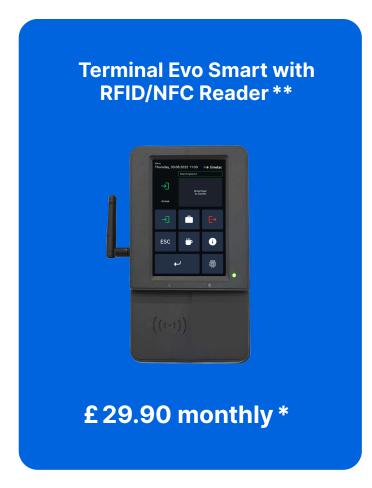

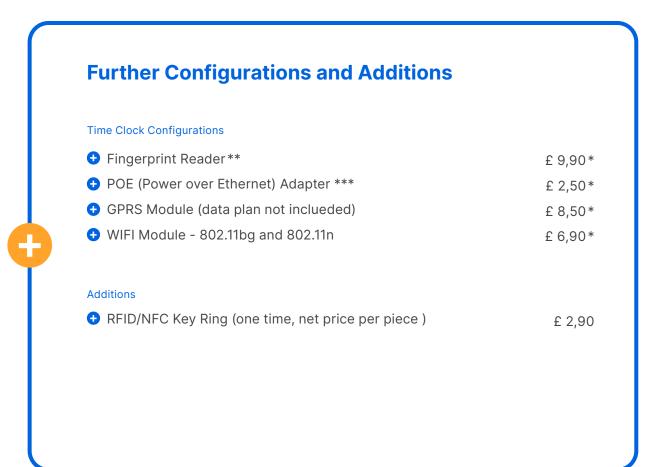

^{*} Monthly rental fee, with a yearly plan. All stated prices are net.

13.56 MHz RFID/NFC Reader (ISO 14443: Mifare-Classic, MifareDesfire, -Plus, Ultralight). Readers for other RFID standards available if required.

^{***} Supported: IEEE 802.3af und IEEE 802.3at

Technical Details

Caseing	Structure	Plastic caseing ABS HB
	Dimensions (height x width x depth)	200 x 109 x 85 mm
	Weight (w/o power supply)	Base unit 0.35 kg plus wall mount plate of 0.125 kg
Display	LCD	TFT 3.5" [8.9 cm] 800 x 480 pixels incl. proximity sensor for automatic activation in sleep mode
Power Supply	Power	12 V DC
Environment values	Ambient temperature	-20°C to + 60°C
	Protection	IP54 front
Data transmission	TCP / IP (optional)	TCP / IP operating with integrated TCP / IP stack, 10/100 Mbit
	WIFI (optional)	Integrated wireless LAN module, WIFI 802.11 bg and 802.11n (Only 2.4 GHz)
	GSM / GPRS (optional)	GSM/GPRS, mobile module quad band 850 / 900 / 1800 / 1900 MHz
	USB	Micro-USB for setup of data transmission
	Details	 via HTTPS, DHCP as per default DNS per default 8.8.8.8, individual settings possible The ports 443 und 8000 have to be released. Port 443 for data transmission to gt.timetac.com and port 8000 for maintenance connection on dfa.timetac.com
Additional Options	Fingerprint	Fingerprint module optional; sensor in lower right of housing
	Transponder reader	125KHz - Unique, titanium, Hitag. 13,56 MHz - Legic, Mifare, ISO14443, ISO15693, SimonsVoss, iButton, Nedap

DE: 0800 - 240 40 50 AT: 0800 - 240 40 50 CH: 0800 - 240 40 5

www.timetac.com office@timetac.com